


# ExtendaChip

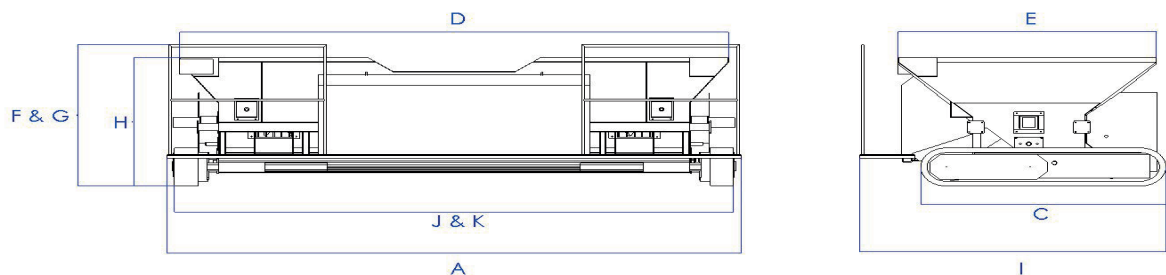

### WEIGHT & DIMENSIONS

WEIGHT (empty)	4300 kg
I. MACHINE LENGTH	2550 mm
I. TRANSPORT LENGTH	2550 mm
C. TRACK LENGTH	1800 mm
E. HOPPER LENGTH	2000 mm
D. HOPPER WIDTH	4253 mm
G. TRANSPORT HEIGHT	1395 mm
G. MAX WORKING HEIGHT	1395 mm
H. MATERIAL LOAD HEIGHT	1260 mm
A. TRANSPORT WIDTH	4455 mm
J. TRACK GAUGE WIDTH - MINIMUM	4252 mm
K. TRACK GAUGE WIDTH - MAXIMUM	5427 mm
MAX. APPROACH ANGLE	15.5° (front ) / 10° (back)

### CAPACITY & PERFORMANCE

CHIPPING SPEED (MAX.)	20 m/min
TRANSPORT SPEED (MAX.)	3.0 km/h

### CRAWLER

CRAWLER LENGTH (AXLE TRACK)	1800 mm
CRAWLER WIDTH (PADS)	205 mm

FINAL DRIVE	Direct drive over transmission
-------------	--------------------------------

BASIC WIDTH	12ft
HYDRAULICAL EXTENDED WIDTH	Variable Between 12ft and 16ft in 1ft Increments
CHIPPING SPEED	Variable up to 20 mtrs/min
TRAVEL SPEED	2 Speed control up to 3 km/hr
CONTROL GATES	Hydraulically operated with Digital Readout.



### Patent Pending

HOPPER CAPACITY	5 cu/mtrs
HOPPER DUMPING HEIGHT	1260 mm
GROUND CLEARANCE	185mm
HOPPER WIDTH, INTERNAL	2000 mm
AUGER DIAMETER -MAIN	230 mm
AUGER DIAMETER- CROSSFEED TO EXTENSIONS	180 mm
AUGER CONTROL	Manual and Automatic with limit switches
WIDTH ADJUSTMENT	Hydraulic
HEIGHT ADJUST	Hydraulic on main/manual on ext
MANUAL CHIP DISTRIBUTION	By access Trays at Rear

### ENGINE

ENGINE MODEL	Kubota V1505
RATED POWER @ 2200 RPM	18 kW
EMISSIONS	Tier 4 final
ELECTRICS	12volt
FUEL TANK CAPACITY	40 l

### OPERATOR STATION

DASHBOARD	Conventional control
PLATFORM	With back rest for operator safety
LOADING	Detachable Handset

PAVEMAC SETS NEW INDUSTRY STANDARD  
VARIABLE WIDTH PRE-COATED CHIP SPREADER

# ExtendaChip



Three-in-One  
12ft, 14ft & 16ft

It's a new era in chip spreaders. The Extendachip is the result of collaboration with major contractors in response to the surfacing industries need to improve health & safety standards plus productivity. After two years in the making, this chipper is a quantum leap in both design and manufacture with safety being the key focus. The Pavemac Extendachip KS12-16 is now the preferred chipper for many contractors and local authorities.

Pavemac Ltd  
Eastwood End, Wimblington  
Cambs PE15 0QH  
Tel: 01354 740170  
Email: Sales@pavemac.com  
For additional product information and services please visit Pavemac.com  
Specifications are subject to change.

**pavemac**  
pavemac.com

**pavemac**



# KS12-16 **Extenda**Chip

## KEY SAFETY AND OPERATIONAL **BENEFITS**




### **360 degree vision, operator platform and 7 emergency stops**

Enhanced operator safety  
with 360 degree view, stand on  
operator platform and 7  
emergency stops



### **Chipping widths**

Saving time and both asset &  
operational costs, one machine  
can operate at 3 chipping  
widths 12' – 14' – 16'

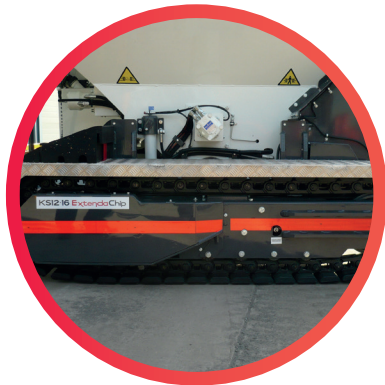

### **Brakes**

Fail safe braking system  
built into track drive



### **Large hopper and low load height**

Large capacity hopper reduces  
load cycle and low load height  
increases safety




### **Travel speed**

Easily controlled operation  
and high speed travel on site



### **Hydraulically operated feeder gates**

Taking workforce out of the work  
area with hydraulically operated  
feeder gates

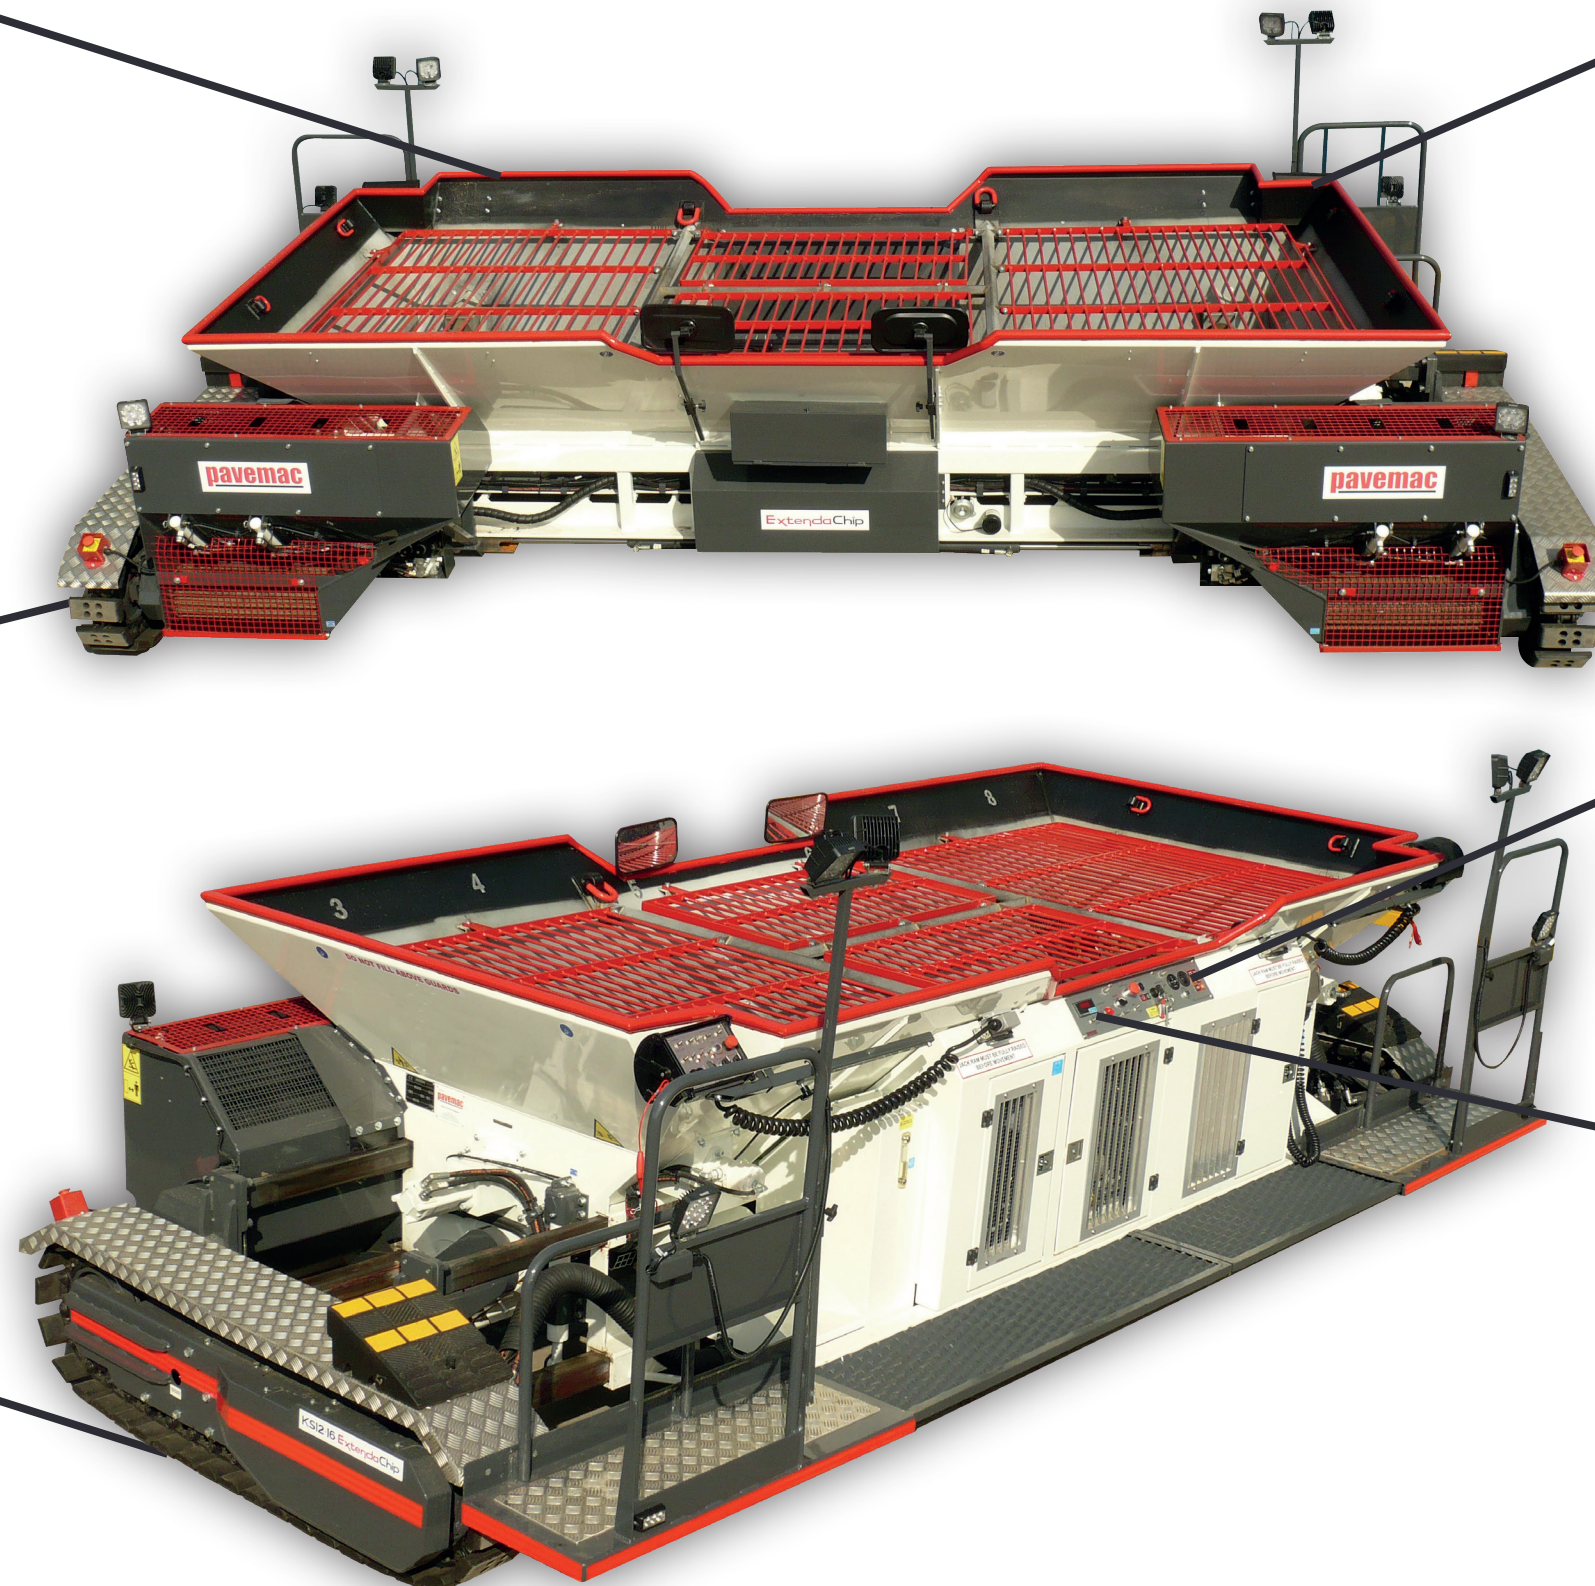

**Available now from Pavemac, call 01354 740170**